



800.364.7681

"The GREEN Solution to Dog Pollution".



www.DOGIPOT.com

"The Clean Solution to Dog Pollution".

ALUMINUM DOGIPOT® DOGVALET (ITEM #1001-2)

SPECIFICATION, INSTALLATION AND OPERATION SHEET



YOUR ALUMINUM DOGIPOT® DOGVALET INCLUDES:


- Aluminum **DOGIPOT® DOGVALET**, forest green
- Two (2) Keys for locking front access lid (same key fits all **DOGIPOT®** dispensers except ITEM #1007-2)
- Two (2) rolls of OXO-BIODEGRADABLE **DOGIPOT®** Litter Pick Up Bags (ITEM #1402) (200 count per roll), installed in **DOGIPOT® DOGVALET** Lid
- One (1) box OXO-BIODEGRADABLE **DOGIPOT®** Liner Trash Bags (ITEM #1404) (50 Count)
- Two (2) 2" x 5/16" bolts and lock washers
- Aluminum mounting pillar

PLEASE CHECK THE ABOVE INVENTORY AND CALL YOUR DISTRIBUTOR IF ANY PARTS ARE MISSING.

INSTALLATION AND OPERATION INSTRUCTIONS

1. Select a good visible spot in your community or park where you want to install the Aluminum **DOGIPOT® DOGVALET**.
2. Dig a 7" diameter hole, approx. 12" deep into the soft ground. Insert the aluminum mounting pillar up to marker line approx. 12" into the hole filled with a 40 lb. bag of "ready to use concrete mix". **The mounting plate should be approx. 10½" above the ground . Level the post in straight vertical position and let concrete dry for at least 12 hours.**
3. After concrete is dry, the mounting pillar should be sturdy and safe for installation. Slide the Aluminum **DOGIPOT® DOGVALET** over the pillar, matching the holes in the mounting plate with the holes in the **DOGVALET** body plate. Secure the **DOGVALET** with the two (2) 5/16" bolts and lockwashers using a ½" wrench.
4. Insert one of the enclosed OXO-BIODEGRADABLE **DOGIPOT®** Trash Liner Bags into the container body (fold over the upper edge of the container)
5. To replace the rolls of OXO-BIODEGRADABLE **DOGIPOT®** Litter Pick Up Bags, pull out the empty box, remove the diamond shaped perforated tab from a new bag/roll box and push box in place on the lid shelf. The lid dispenser opening should match the box opening and the lettering on the box should not be upside down. Be sure that the bags will be dispensed following the upper wall of the dispenser opening (see Illustration A and B) to ensure maximum tension when tearing off bags. **The DOGIPOT® printing on the litter pick up bags will be visible when hanging out of the dispenser slots.** Close the lid and pull the first bag out by finding the raw edge of the first bag through the dispenser opening.

6. ENJOY WATCHING PET OWNERS PICK UP AFTER THEIR DOGS!

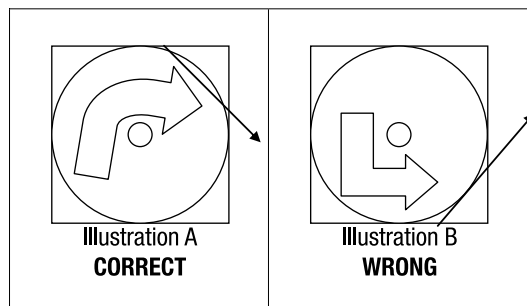



800.364.7681

"The GREEN Solution to Dog Pollution".



www.DOGIPOT.com

"The Clean Solution to Dog Pollution".

ALUMINUM DOGIPOT® DOGVALET (ITEM #1001-2)

SPECIFICATION, INSTALLATION AND OPERATION SHEET

(A) ALUMINUM DOGIPOT® DOGVALET (ITEM #1001-2)

- H: 30" x W: 17" x D: 10"
- .09 gauge powder coated forest green aluminum
- Weight: 40 lbs.
- 400 bag capacity
- Two Diamond bag dispenser slots
- Locking front access lid
- One (1) box 50 Count OXO-BIODEGRADABLE DOGIPOT® Liner Trash Bags (ITEM #1404) included (5 lbs.)
- 4½" diameter square receptacle openings on each side with rubber flaps
- Clearly posted instructions

(B) ALUMINUM MOUNTING POST WITH PLATE

- H: 22" x W: 1.5" x D: 1.5"
- .12 gauge aluminum
- Top plate is 3.5" x 3.0" x 1/4" with 2 5/16" tapped holes
- Weight: 2 lbs.

TOTAL HEIGHT FROM ABOVE GROUND:

- 40"

SPACE BETWEEN GROUND AND DOGVALET:

- 10.0"

HOLE:

- D: 12.0" x W: 7.0"
- Fill with 40 lbs. "ready to use" cement

TOTAL SHIP WEIGHT: 42 LBS.

(MOUNTING HARDWARE INCLUDED)

